


**TRINCO<sup>TM</sup> DRY BLAST EQUIPMENT**  
**TRINCO<sup>TM</sup> MODEL DP850 PRESSURE RETROFIT PACKAGE**

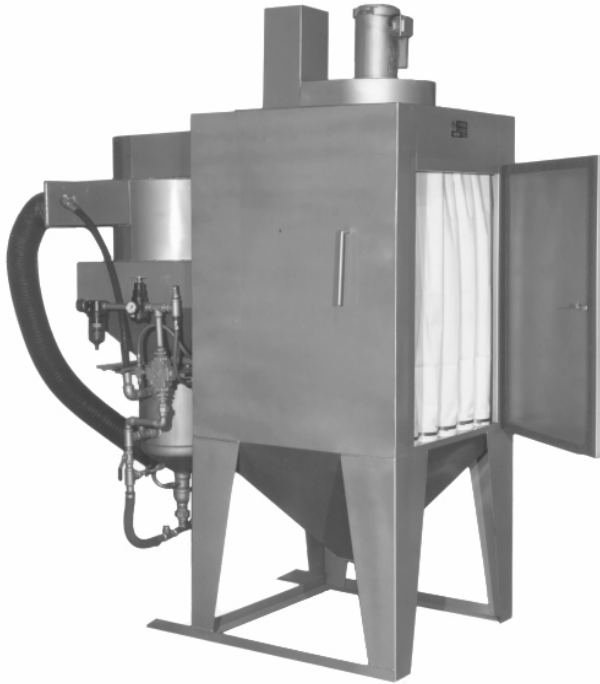

- Trinco<sup>TM</sup> Abrasive separator is constructed of 11 gauge welded steel for durability and is tuneable for different medias
- Trinco<sup>TM</sup> Dust Collector is constructed of 14 gauge welded steel
- ASME Coded pressure vessel with easy access clean out port, automatic sealing plunger, and pneumatic vibrator
- 3/4" Piping and heavy duty mixing valve
- 30 - 120 PSI pressure range
- Abrasive capacity - 100 Lbs standard
- Trinco<sup>TM</sup> Vibrating particle screen in abrasive separator
- Includes:
  - Airline water filter
  - Pressure regulator and gauge
  - Safety enclosed foot pedal
  - 1/2" ID heavy duty blast hose
  - Tungsten carbide nozzle
  - 1/4" ID nozzle standard, 1/8", 3/16" and 5/16" optional

**CONVERT A SIPHON TYPE CABINET TO A DIRECT PRESSURE UNIT. THIS IS THE SAME HIGH QUALITY UNIT USED ON ALL TRINCO<sup>TM</sup> DIRECT PRESSURE CABINETS.**

**SPECIFICATIONS**

**Dust Collector**

- Trinco<sup>TM</sup> Pull through type dust collector with motor and impeller on "clean air side"
- Includes 30 Trinco<sup>TM</sup> Tubular filter bags (145 Sq ft. surface area)
- Trinco manual bag shaker

**Abrasive Separator**

Rated 850 CFM  
 Motor: 2HP - 3450 R.P.M. - 230V, 1 Phase, 60 HZ

**Overall Dimensions**

Height	100"
Depth	40"
Width	64"
Shipping Weight	1,000 Lbs.

NOTE: This unit is designed to handle most standard media. Please specify type and size of media when ordering.